

Pumping up New designed submersible pump with invertible delivery flange.


residual water up to 1mm!!



警告 人が入っている水中では運転しないで下さい。
 アース線と漏電ブレーカーを必ず取り付けて下さい。
 修理技術者以外の人には絶対に分解したり
 修理、改造は行わないで下さい。

注意 使用前に取扱説明書を必ず読んで下さい。
 空運転は絶対にしないで下さい。

NO. 0430298




KOSHINPUMP.COM

KOSHIN LTD.

Photo : PXL-25

Reduce water height to as low as 1mm

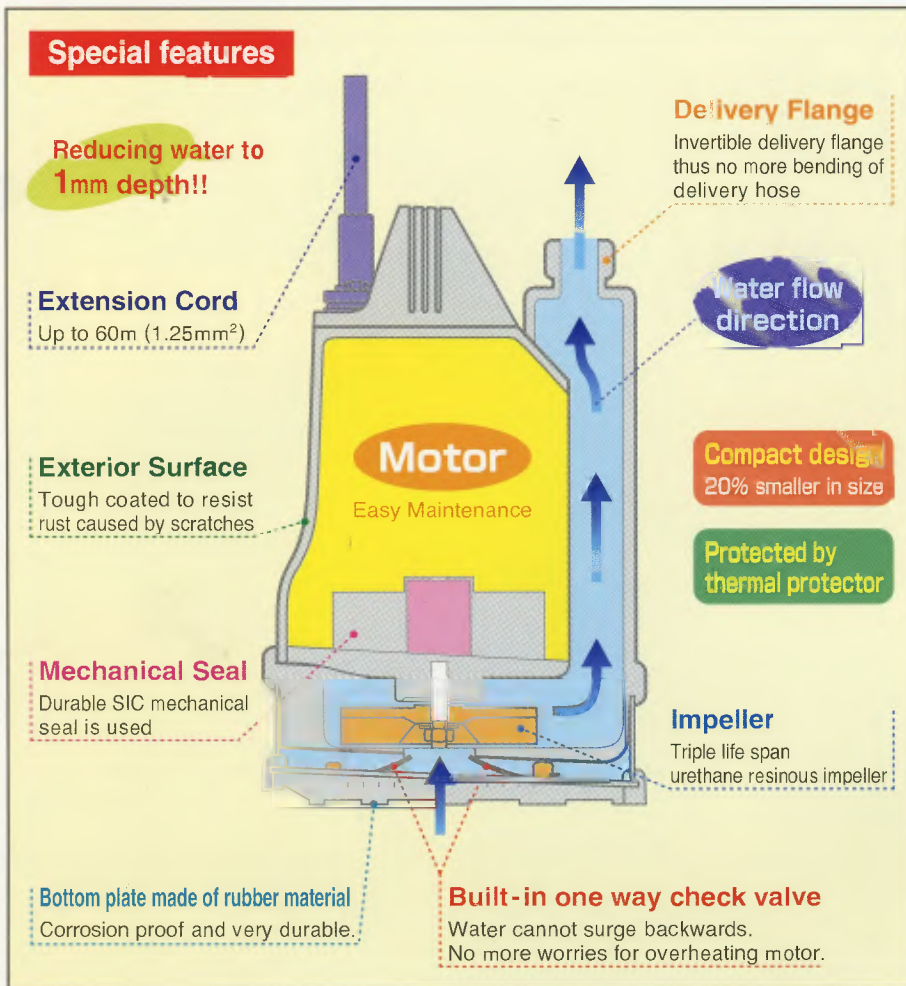


Triple life span due to urethane resinous Impeller as compared with cast iron Impeller.



Suitable for

- Disposal of residual water from roof tank of buildings, swimming pool, etc.
- Water drainage at construction site.
- Drainage of underground water.
- Narrow access drainage especially in manhole or bottom pit.

Performance curve

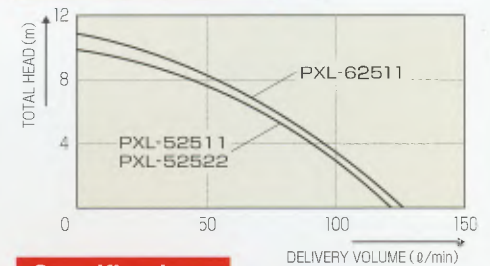

Specifications

Model	PXL-52511	PXL-52522	PXL-62511
Connection Dia	25mm (1")		
Total Head	10m		11m
Delivery Volume	120l/min		125l/min
Voltage	AC-110V	AC-220V	AC-110V
Frequency	50Hz		60Hz
Output	400W		
Rated Current	6.0A	2.9A	6.8A
Consumption	590W	540W	680W
Revolution	2900rpm		3400rpm
Model	Condenser Induction Motor		
Power Cord	5m		
Dimension	H315×W191×D224mm		
Gross Weight	11.8kg		
Minimum water level for operation	30mm		
Standard Accessories	Hose band (φ32) 1 Hose nipple (φ25) 1 Coupling (φ25) 1 Coupling packing (φ25) 1 Rope 5m		

*Condenser motor requires 3 times starting rated current.



For the purpose of improvement, specifications are subject to changes without notice.